




Alterator-manager, backend3 и remote

Иван Савин

E-mail: svn17@basealt.ru

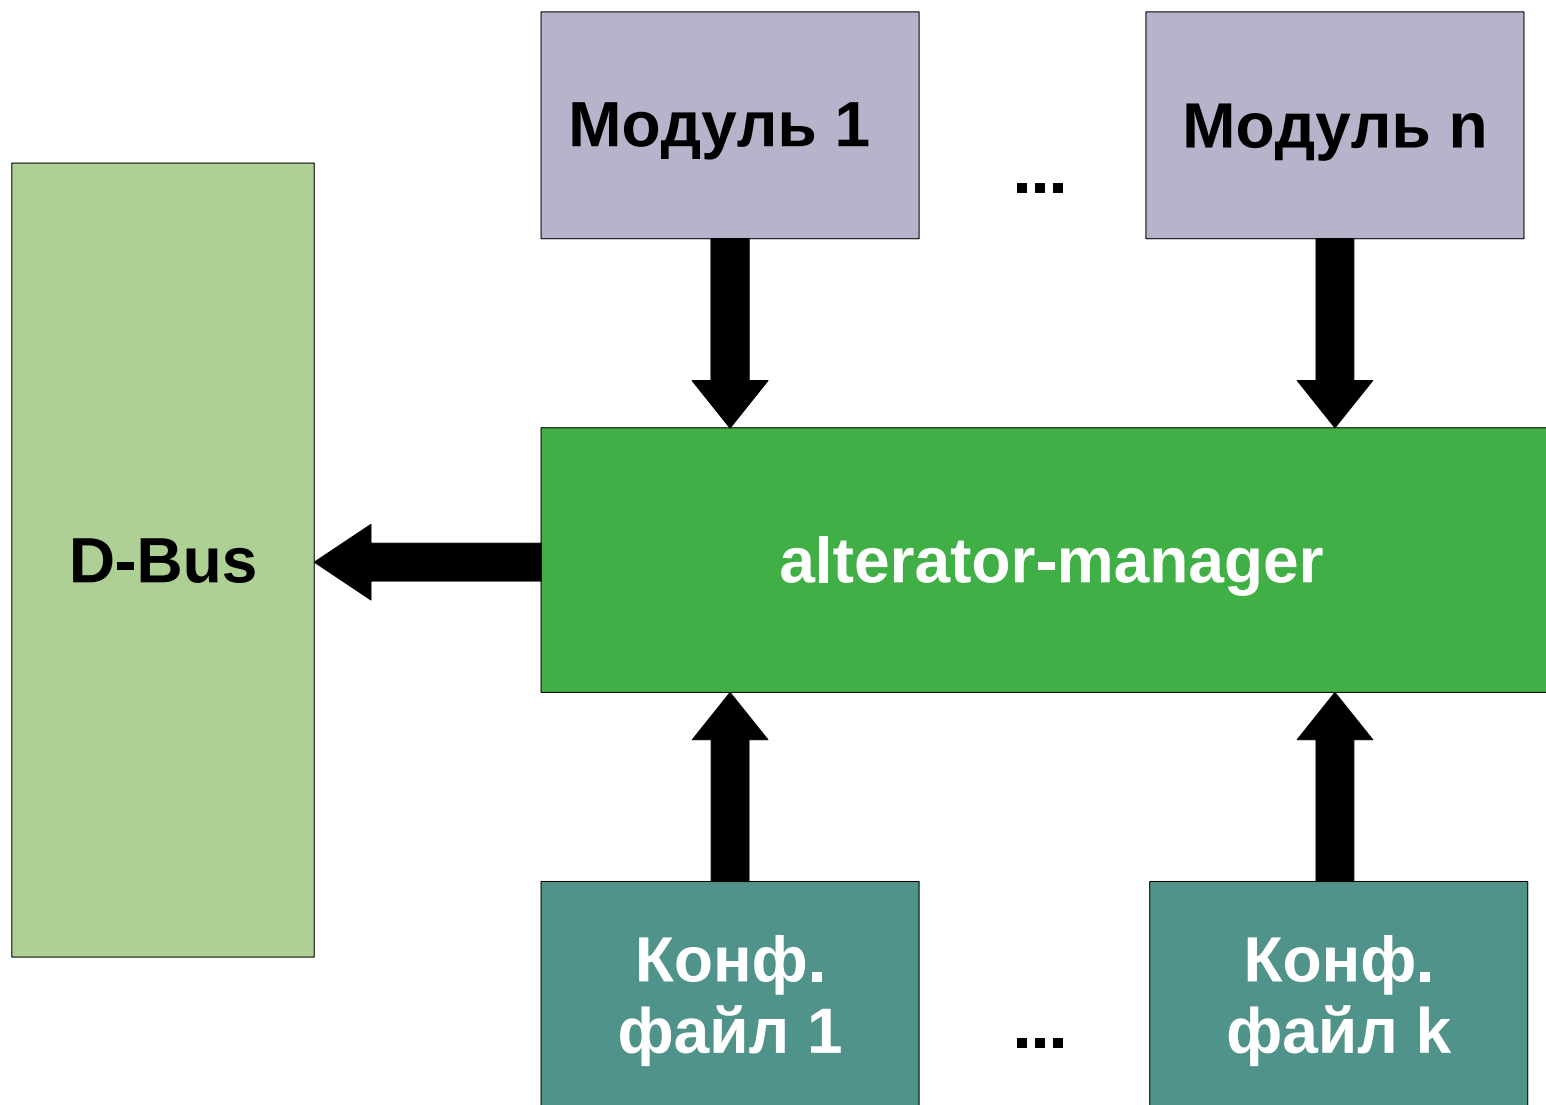

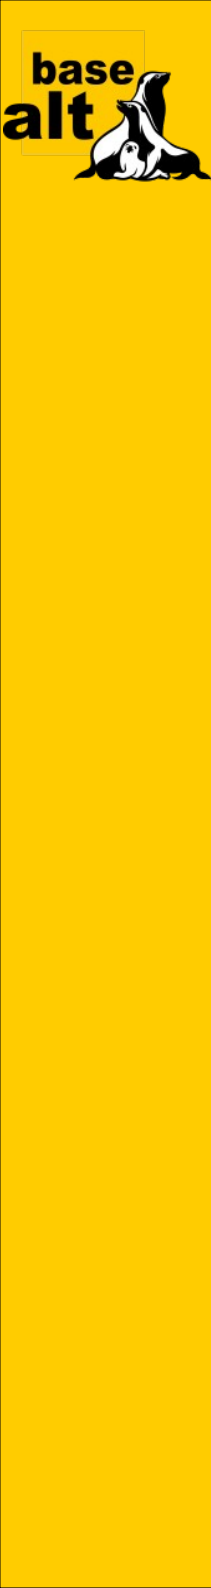

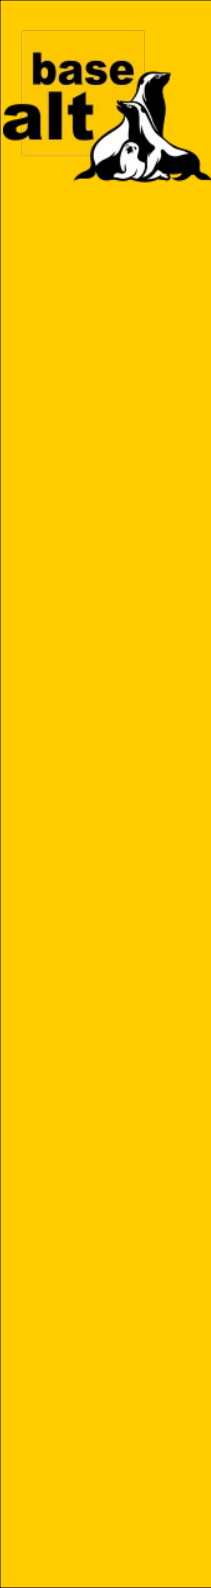

Service **org.altlinux.alterator**

_ /org/altlinux/alterator

_ /org/altlinux/alterator/example

Interfaces

_ org.altlinux.Example1

Methods

_ Hexdump (String file_name) → (Array of [String] stdout_strings, Int32 res)

type = "Backend"

module = "executor"

name = "example"


interface = "Example1"

action_id = "org.altlinux.alterator"

[methods.Hexdump]

execute = "hexdump -C {file_name}"

stdout_strings = true

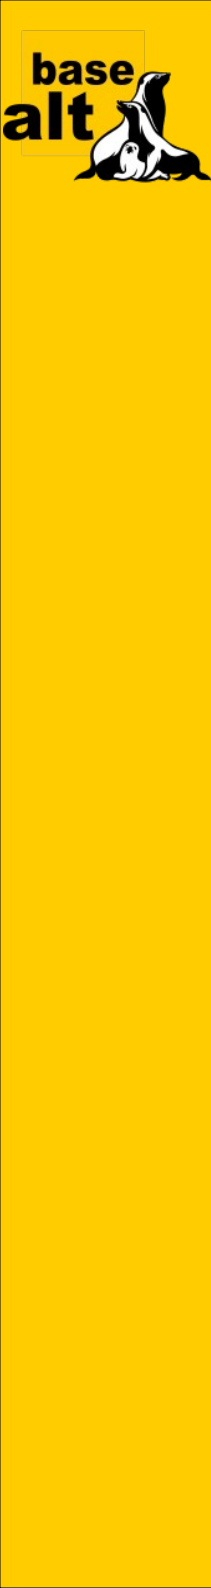

Service **org.altlinux.alterator**

_ /org/altlinux/alterator

_ /org/altlinux/alterator/example

Interfaces

_ org.altlinux.Example1

Methods

_ MenuList (Dict of {String, String}) → (Array of [Dict of {String, String}])

type = "Backend"

module = "backend3"

name = "example"

interface = "Example1"

action_id = "org.altlinux.alterator"


[methods.MenuList]

backend3 = "menu"

_objects = "avail_modules"

language = "ru_RU"

action = "list"

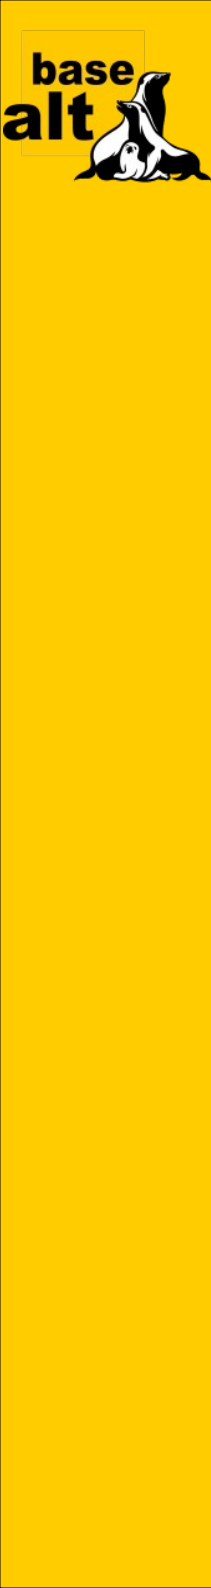

Service **org.altlinux.alterator**

_ /org/altlinux/alterator


_ /org/altlinux/alterator/remote


Interfaces

_ org.altlinux.alterator.remote

Methods

```
\_ Connect (String remote_address,  
|         String connection_name,  
|         String agent_bus_name,  
|         String pty)      → (Boolean response, String object_path)  
\_ Disconnect (String connection_name) → (Boolean response)  
\_ GetConnections () → (Array of [String] connections)
```

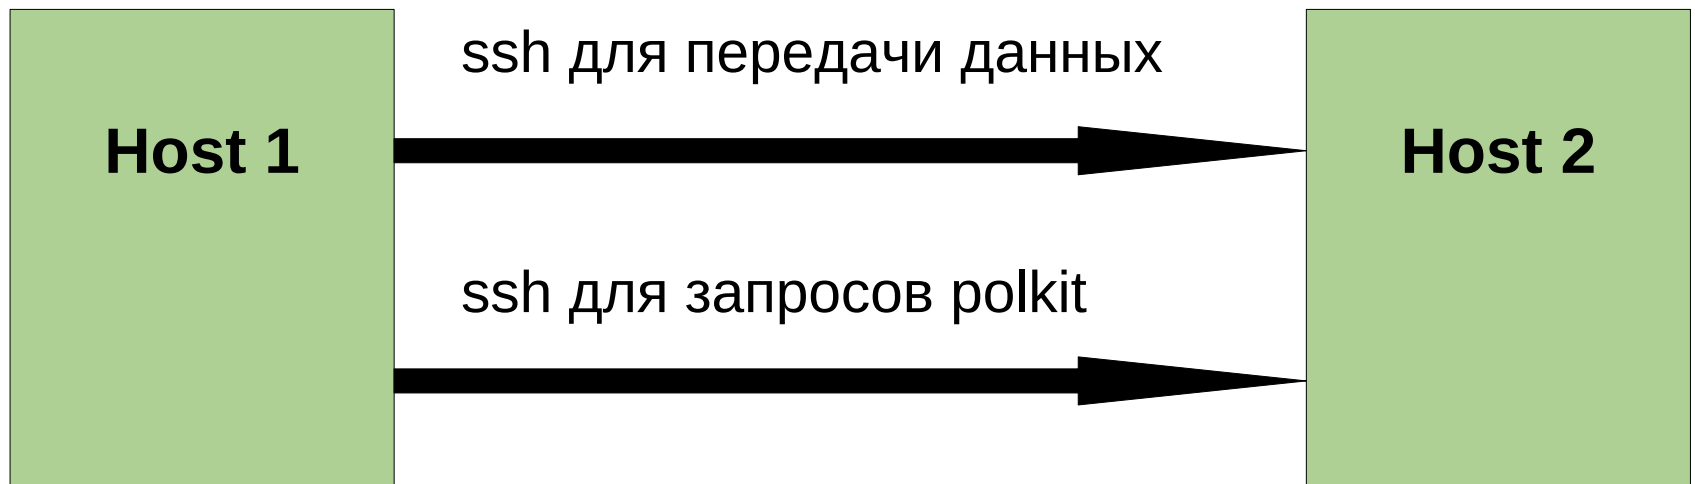

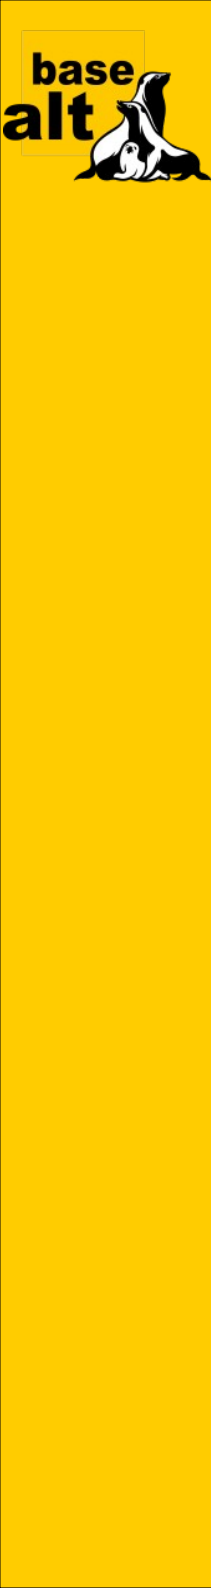

Service **org.altlinux.alterator**

_ /org/altlinux/alterator

_ /org/altlinux/alterator/remote

| **Interfaces**

| _ org.altlinux.alterator.remote

| **Methods**

| _ Connect (**String** remote_address,
| | **String** connection_name,
| | **String** agent_bus_name,
| | **String** pty) → (**Boolean** response, **String** object_path)

| _ Disconnect (**String** connection_name) → (**Boolean** response)

| _ GetConnections () → (**Array of [String]** connections)

_ /org/altlinux/alterator/connection/connection to host2


_ /org/altlinux/alterator/connection/connection to host2/example

Interfaces

_ org.altlinux.Example1

Methods

_ Hexdump (**String** file_name) → (**Array of [String]** stdout_strings, **Int32** res)

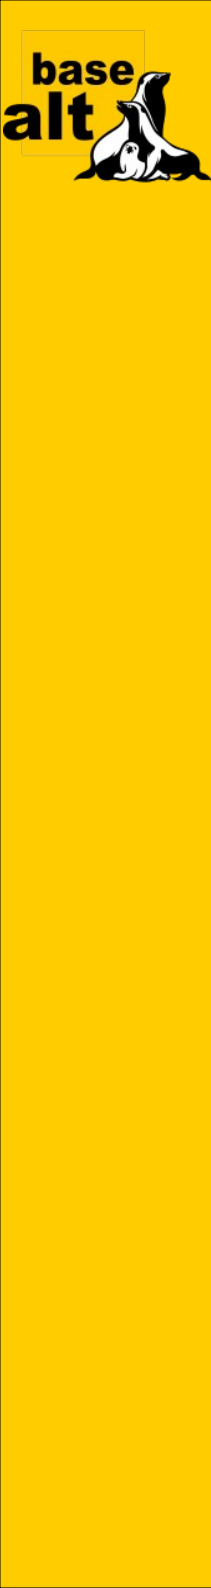

<https://git.altlinux.org/gears/a/alterator-manager.git>

<https://git.altlinux.org/gears/a/alterator-module-executor.git>

<https://git.altlinux.org/gears/a/alterator-module-backend3.git>

<https://git.altlinux.org/gears/a/alterator-module-remote.git>

<https://git.altlinux.org/gears/r/remote-polkit-agent.git>